

Scale: 1/2" = 1'

Direct-View LED Traffic Controller SA22120R-C613

PRODUCT NUMBER
12063



CABINET DIMENSIONS
22" H x 120" W x 5.5" D

ILLUMINATION SOURCE

Super bright, wide viewing angle Red / Green LEDs
Messages "blankout" when turned off, eliminating confusion
Long life, solid state lighting

ELECTRICAL

Integrated solid state power supply
Standard Voltage: 120 VAC, Optional Voltages: 9-36 V, 240 VAC, 277 VAC
Maximum amps per lighted message (at 120 V) shown in the table below
Communications RS485, RS232, RS422
Conduit Location - Communications Bottom Left / Electrical Bottom Right Standard
Note: Communications and Electrical MUST Be In Separate Conduits
UL/CUL approved for wet locations

CONSTRUCTION



Faces: Single Faced Sign
Extrusion (TCL): Mitered 5.5" deep corrosion resistant housing.
Face Material: Impact Resistant, Red tinted Acrylic 1/8" thick.
P Disk Topper: 1/8" aluminum panel returns the depth of sign (non-illuminated)

FINISH

Standard Cabinet Color: Duranodic Bronze
Custom colors available upon request

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

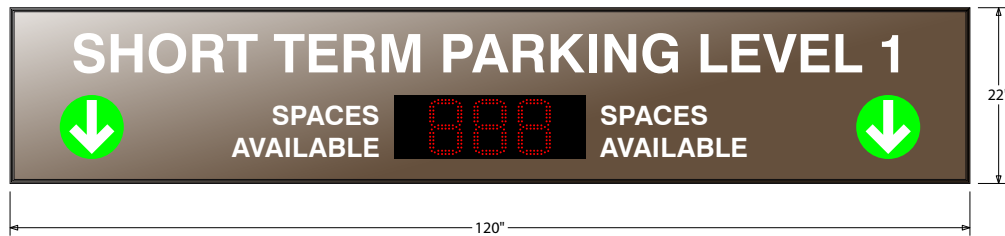

MESSAGE	COLOR	HEIGHT	AMPS
SHORT TERM PARKING	Vinyl V-5	12.0"	na
LEVEL 1	Vinyl V-1R	5.0"	na
DOWN ARROW SYMBOLS	Vinyl V-1R	8.0"	na
SPACES AVAILABLE	Vinyl V-2	2.5"	na
3 Digit 7 Segment Display	30° x 70° Red Oval	7.0"	0.14



Trans-Tech
4999 Pittsburgh Ave.
Erie, PA 16509
Phone: (888) 811-7010
Fax: (814) 836-8401
Email: sales@transportation-tech.com
Website: www.transportation-tech.com



Proudly Made in the USA