

Direct-View LED Traffic Controller TCL418R-FD

PRODUCT NUMBER
7899



CABINET DIMENSIONS
4" H x 18" W x 2.5" D

ILLUMINATION SOURCE

Super bright, red tinted LEDs
Messages "blankout" when turned off, eliminating confusion
Long life, solid state lighting

VMS FUNCTIONS

Message has scrolling and blinking capabilities
1 Line of changeable 2" tall, red characters
Uses Signal-Tech Protocol Version 1.7

ELECTRICAL

Integrated solid state power supply
RS-232, RS-422, RS-485 Data Input
Standard Voltage: 120 VAC, Optional Voltages: 24 VDC
Maximum amps per lighted message (at 120 V) shown in the table below
UL/CUL approved for wet locations

CONSTRUCTION

Faces: Single Faced Sign
Extrusion (TCL): 2.5" Slim line continuous, corrosion resistant, aluminum housing
Face Material: Impact Resistant, smoked tinted Polycarbonate 1/8" thick.

FINISH

Standard Cabinet Color: Duranodic Bronze
Custom colors available upon request

MESSAGE	COLOR	HEIGHT	AMPS
Variable Message	Red Tinted LEDs	2.0"	0.2

Trans-Tech
4999 Pittsburgh Ave.
Erie, PA 16509
Phone: (888) 811-7010
Fax: (814) 836-8401
Email: sales@transportation-tech.com
Website: www.transportation-tech.com




Proudly Made in the USA

Product View

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.


All Interior Hardware Is
Corrosion Resistant

Front View

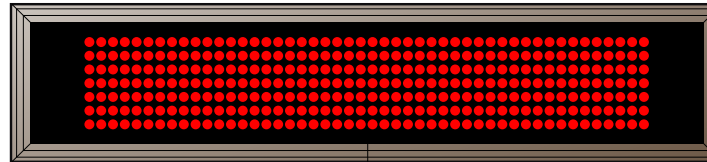


Tinted Polycarbonate Face Panel

Side View



Full Matrix FEE DISPLAY
8 Characters
Characters are 2" Tall
and are able to Scroll


Back View

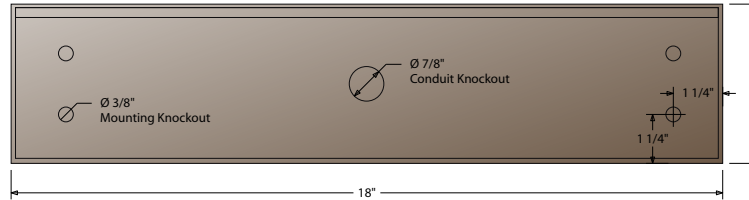


Electrical Conduit
Knockout Placement
Middle
(When Viewed From Back)



FEE DISPLAY View

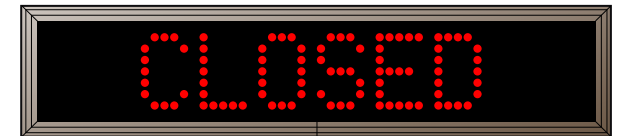

CLOSED View

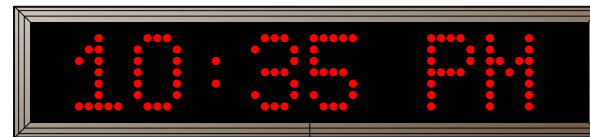

TIME DISPLAY View



THANK YOU View